# Shot Setup

Jay R. Dittmann
CDF Ace Training
March 27, 2002

# Beamspeak:


- Store period during which a steady particle beam is present in the Tevatron
  - usually means both protons and antiprotons are present
  - are numbered sequentially
  - can last from minutes to hours to days
  - can sometimes end abruptly

# Beamspeak:

(continued)

- Shot the injection of antiprotons from the Accumulator into the Main Injector and on into the Tevatron in preparation for colliding beams operation
- Shot Setup the sequence of events leading to antiproton shots

# The Fermilab Accelerator Chain

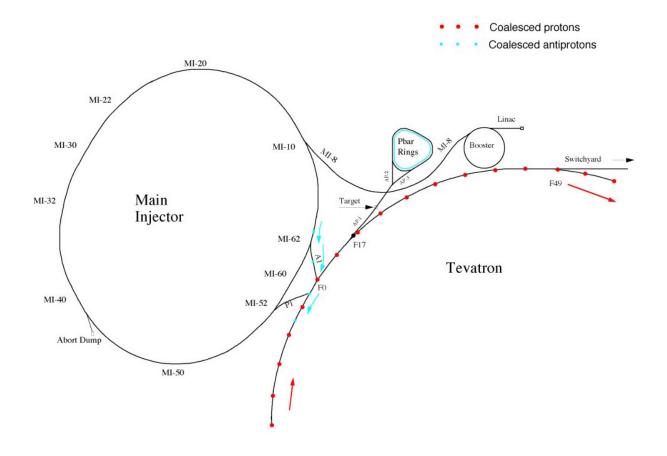

# Shot Setup at CDF — Overview

## At the end of the previous store:

- finish the data-taking run
- before previous store is dumped, ramp down HV (allow 5 minutes)

The Main Control Room (MCR) should notify CDF in advance of planned beam dumps.

# Shot Setup at CDF — Overview

#### Between one store and the next:

- Assume sufficient phars to shoot again
- Time between shots:
  - currently 2-3 hours (on a good day)
  - Beams Division aims to reduce the time to 1 hour
- Calibrations (Quiet Time?)

# Shot Setup at CDF — Overview

### Beginning the next store:

- Protons are injected first, then pbars
- Accelerate beams to 980 GeV
- Cogging
- Low Beta Squeeze
- Scraping

Once losses are low and the beam is stable, Ramp HV and begin taking data.

# Shot Setup at CDF — More detail

- Injection the process of transferring protons or antiprotons from the Main Injector to the Tevatron (4 bunches at a time)
- Ramping the magnetic fields of the magnets are increased simultaneously, boosting proton/pbar energies from 150 GeV to 980 GeV ("flattop")

# Shot Setup at CDF — More detail

- Cogging the process of spacing bunches of protons or pbars in the Tevatron so that they will collide at the proper points in the ring
- Low beta squeeze after injecting protons and pbars into the Tevatron, a special set of quadrupoles ("low beta quads") are turned on at BO to reduce the size of the beam and increase luminosity
- Scraping using collimators to remove the beam "halo" and reduce losses

MCR will notify CDF when scraping is complete!

## Shot Setup — What to watch in ACNET


#### A shot is going in...

- C:BOPLOS BO proton losses from BSC (Hz)
- C:BOALOS BO antiproton losses from BSC (Hz)
- C:LOSTP Proton losses fast response (Hz)
- C:LOSTPB Antiproton losses fast response (Hz)
- C:BOILUM BO delivered instantaneous luminosity (E30 cm<sup>-1</sup> s<sup>-1</sup>)
- C:BOQ5 Current in BO low beta quads (amps)
- T: ERING Tevatron energy (GeV)
- T: IBEAM Tevatron beam current (E12)
- E: SVRAD(O-3) SVX integrated radiation dose (rad)
- E: SVBLA(O,1), SVBLB(O,1) SVX rad instantaneous rates (rad/s)

#### During store, also monitor...

- C:BOILUM BO delivered instantaneous luminosity (E30 cm<sup>-1</sup> s<sup>-1</sup>)
- C:BOLLUM BO live instantaneous luminosity (E30 cm<sup>-1</sup> s<sup>-1</sup>)
- C:BOTLUM integrated delivered luminosity (nb<sup>-1</sup>)
- C:BOTLIV integrated live luminosity (nb<sup>-1</sup>)

#### Example: Shot setup on April 1, 2001 — proton only

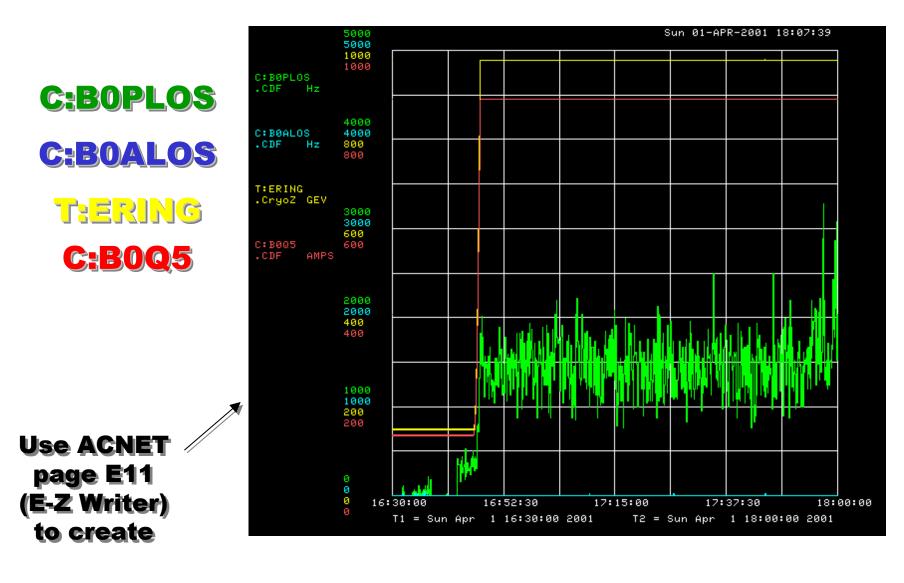




C:BOILUM


C:BOLLUM

C:BOTLIV

C:BOTLUM

Use ACNET
page E11
(E-Z Writer)
to create

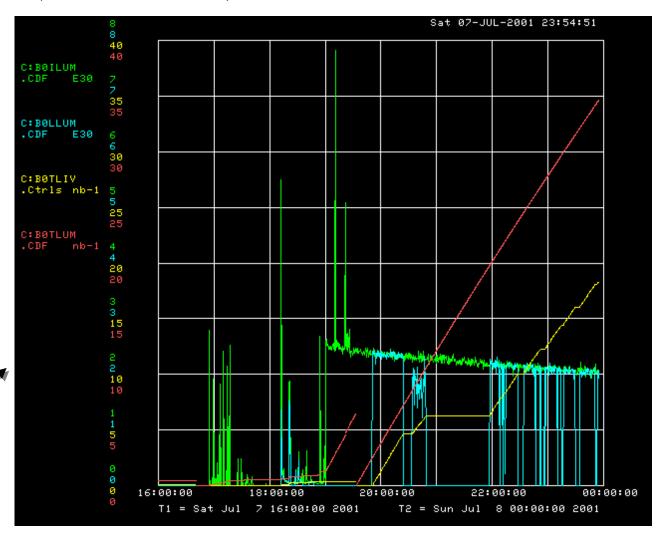

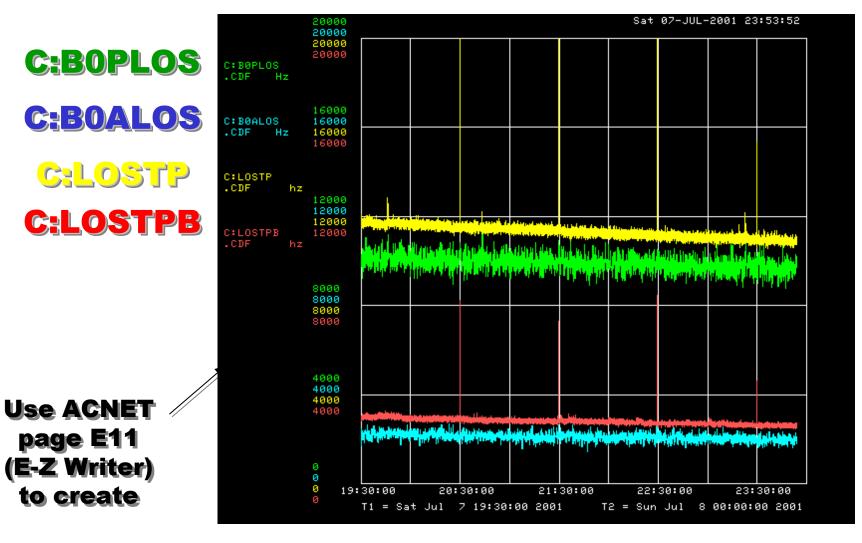


CDF Ace Training, 3/27/2002 J. Dittmann

### Shot Setup — What to watch in ACNET

#### To measure losses for the silicon detectors:


- E: SVBLA1 west inner BLM instantaneous loss rate (rad/s)
- E: SVBLA2 west outer BLM instantaneous loss rate (rad/s)
- E: SVBLB1 east inner BLM instantaneous loss rate (rad/s)
- E: SVBLB2 east outer BLM instantaneous loss rate (rad/s)
- E: SVRADO west inner BLM integrated dose (rad)
- E: SVRAD1 west outer BLM integrated dose (rad)
- E: SVRAD2 east inner BLM integrated dose (rad)
- E: SVRAD3 east outer BLM integrated dose (rad)

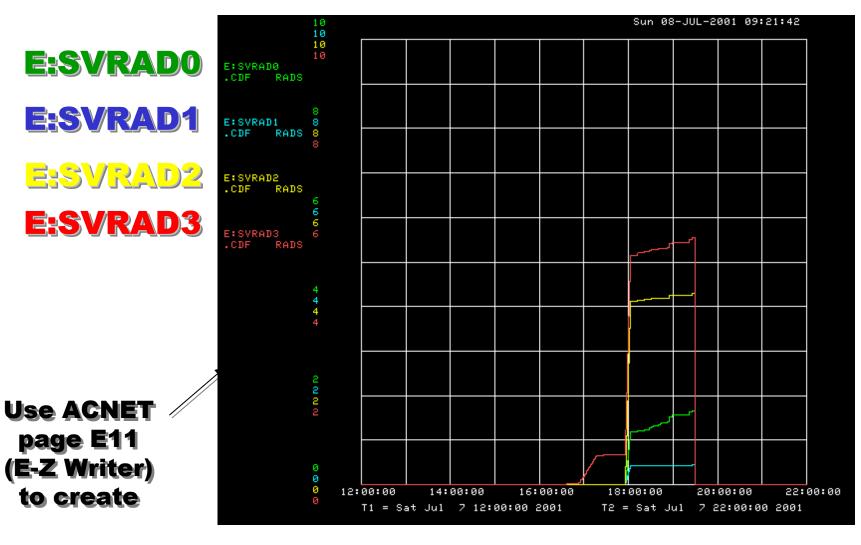

ACNET page E20 allows you to monitor the current values of the instantaneous and integrated dose rates.


```
E20
                       SVX Rad Scaler Readout
                                                          ◆Pgm_Tools◆
    *Global Reset
                                   *Plot FIF0
                                  *Select Display Options
                                  *Display Logged Data
                                  Fifos Recording
                            Rate (R/s) Sum (Rads)
   W Inner BLM
                                         .0378
   W Outer BLM
   E Inner BLM
                                         4.192
   E Outer BLM
                                         3.189
                              Messages
Welcome to the SVX Loss Monitor Page
```

#### SVX rad totals should be recorded for every shot!

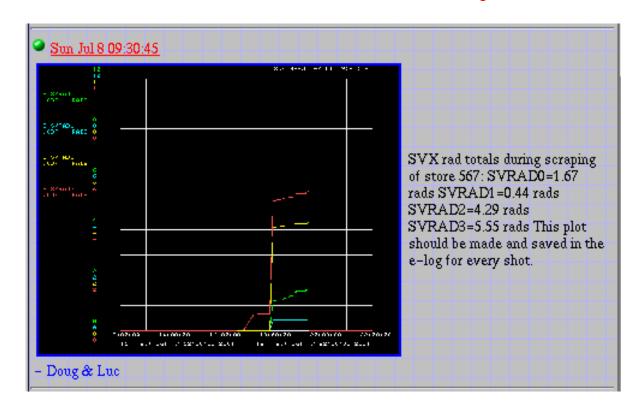

It is important to have these plots up to watch rates during ramping, squeezing, and scraping.

#### Example: TeV store 567 on July 8, 2001 (Owl shift)

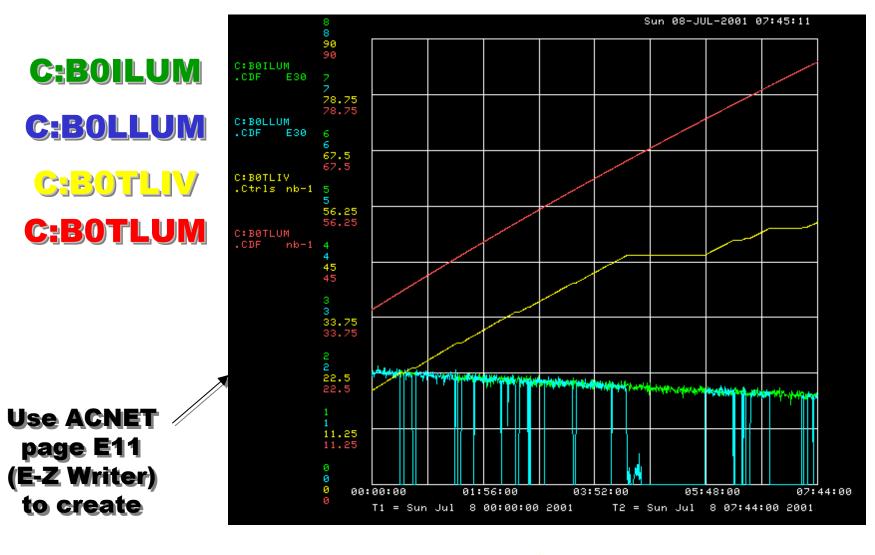

## Shot Setup — What to remember

- Use ACNET to follow the progress of Shot Setup
- For each shot, record:
  - ✓ The times of various milestones:
    - proton/antiproton injection complete
    - ramping to flattop
    - cogging, low beta squeeze
    - scraping complete
  - ✓ The loss rates before and after scraping (plot)
  - ✓ Initial instantaneous luminosity
  - ✓ Integrated delivered / live luminosity per shift (plot)
  - ✓ SVX rad totals (plot)